


40-0018-52

Swing-Out Windshield Weatherstripping




Typical Swing-Out Windshield

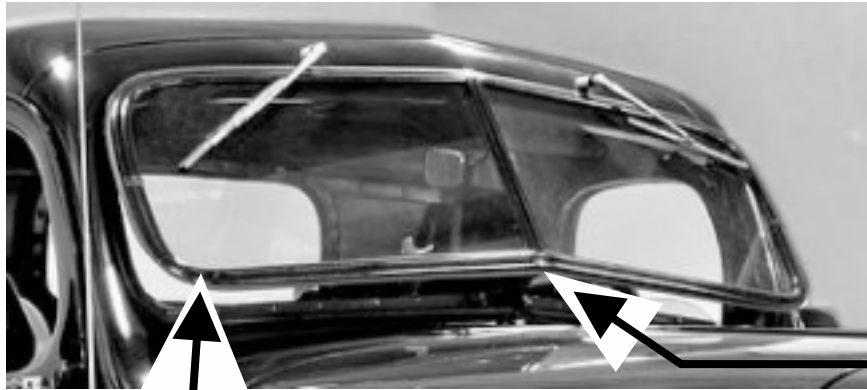


*Location For STEP 2

Typical Swing-Out Frame

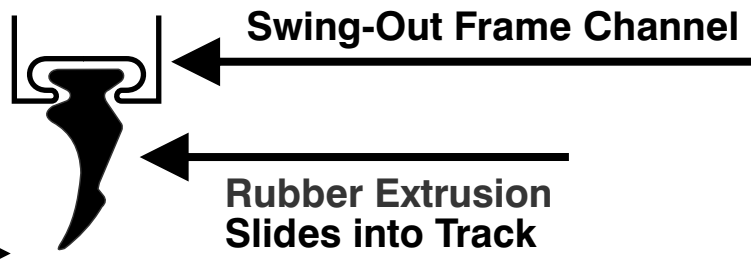


Lip Faces Towards Inside Of Vehicle!

STEP 1



Remove all traces of the old weatherstripping. Clean the swing-out track thoroughly.


STEP 2



You will begin installation of the new extrusion at the **Bottom Center** of the windshield. See pic at the top of this page.

STEP 3

Using a Tuck Tool such as our Part# 94-0110-00, simply work the new extrusion into the track. No Glue necessary! Work extrusion around the frame and trim excess rubber when the 2 ends meet back at **BOTTOM CENTER**.

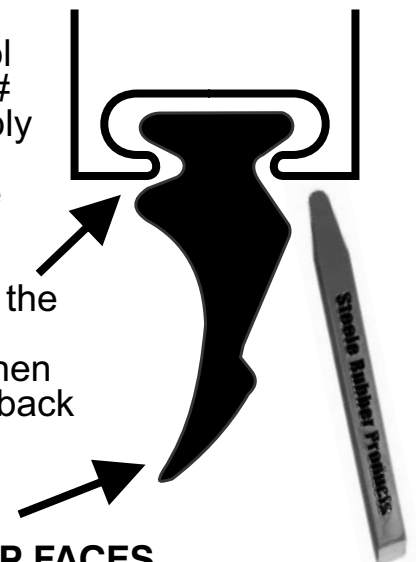

IMPORTANT: LIP FACES TOWARDS INSIDE OF VEHICLE!

