

# 40-0329-50

Swing-Out Windshield Weatherstripping




## Typical Swing-Out Windshield




\*Location For STEP 2

Typical Swing-Out Frame

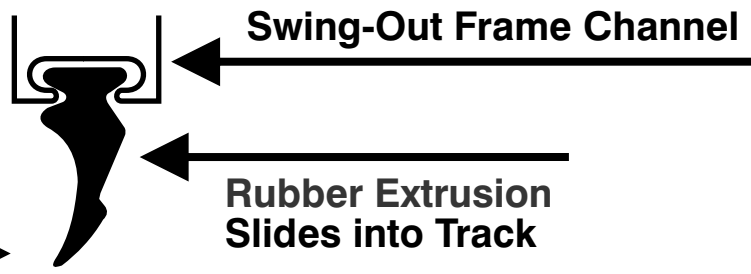


Lip Faces Towards Inside Of Vehicle!

### STEP 1



Remove all traces of the old weatherstripping. Clean the swing-out track thoroughly.


### STEP 2



Locate the vulcanized splice on the rubber gasket. You will want to start with the splice at the bottom center of frame as shown in the pic at the top of this page.

### STEP 3

Using a Tuck Tool such as our Part# 94-0110-00, simply work the new extrusion into the track. No Glue necessary!

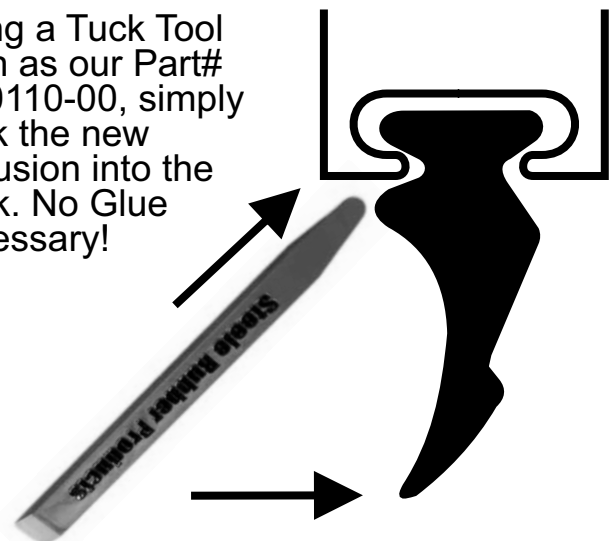

**IMPORTANT: LIP FACES TOWARDS INSIDE OF VEHICLE!**

